

Specifications

Model	GS-3384	
Measurements	Metric	US
Working height maximum*	11.94 m	39 ft 2 in
A Platform height maximum	9.94 m	32 ft 6 in
B Platform height - stowed**	1.55 m	5 ft 1 in
C Platform length outside:		
extended - single deck	3.98 m	13 ft .5 in
extended - dual deck	5.34 m	17 ft 6.25 in
extended - super deck	6.57 m	21 ft 6.5 in
D Slide-out platform extension deck - front	7.38 m	24 ft 2.5 in
E Slide-out platform extension deck - rear	1.52 m	5 ft
F Platform width - outside	1.22 m	4 ft
G Height - stowed: folding guardrails	1.83 m	6 ft
rails lowered	2.68 m	8 ft 9.5 in
H Length - stowed: single deck	2.0 m	6 ft 6.75 in
dual deck	3.94 m	12 ft 11.25 in
super deck	3.98 m	13 ft 5 in
with outriggers	4.81 m	15 ft 9.5 in
Length - extended: single deck	4.88 m	16 ft
dual deck	5.40 m	17 ft 9 in
super deck	6.57 m	21 ft 6.5 in
I Width	7.38 m	24 ft 2.5 in
J Wheelbase	2.13 m	7 ft
K Ground clearance - center	2.84 m	9 ft 4 in
	0.33 m	13 in

Productivity

Maximum platform occupancy	7	7
Lift capacity	1,134 kg	2,500 lbs
ift capacity - extension deck	227 kg	500 lb
Drive height	full height	full height
Drive speed - stowed	6.4 km/h	4.0 mph
Drive speed - raised	1.1 km/h	0.7 mph
Gradeability - stowed***	50%	50%
Maximum outrigger levelling****	7°(front to back)/12°(side to side)	
Turning radius - inside	3.09 m	10 ft 1.5 in
Turning radius - outside	5.94 m	19 ft 6 in
Raise/lower speed	45/29 sec	45/29 sec
Controls	proportional	proportional
Drive	four wheel	four wheel
Tyres - foam-filled rough terrain	25 x 79 cm	10 x 31 in

Power

Power source	Deutz D2011L03i diesel 3 cylinder,49hp(37kW) Stage IIIA		Deutz TD2.2 L3 turbo diesel 3 cylinder, 49hp(37kW) Stage V	
Auxiliary Power unit	12 V DC	12 V DC		
Fuel tank capacity	113.6 L	30 gal		
Hydraulic system capacity	113.6 L	30 gal		

Sound & Vibration Levels

Sound pressure level (ground workstation)	88 dBA	88 dBA	88 dBA	88 dBA
Sound pressure level (platform workstation)	78 dBA	78 dBA	78 dBA	78 dBA
Vibration	<2.5 m/s ²	8 ft 2 in/s ²	<2.5 m/s ²	8 ft 2 in/s ²

Weight*****

CE base machine	5,364 kg	11,825 lbs
The basic unit has the single extension deck, diesel motor, no outriggers, foam-filled or non-marking tyres, CE link guard and CE load sense.		
Unit weight modifiers for options		
Outriggers*****	add 760 kg	1,675 lbs
Dual Extension decks	add 356 kg	784 lbs
Super decks	add 411 kg	906 lbs
Generator	add 48 kg	105 lbs

Standards Compliance

EU Directives: 2006/42/EC - Machinery
(harmonized standard EN280:2013+A1:2015);
2004/108/EC (EMC); 2000/14/EC (Outdoor Noise)

* The metric equivalent of working height adds 2 m to platform height.

** Based on RT tyres. Deduct 5.08 cm (2 in) for non-marking tyres.

*** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

**** Outriggers are optional.

***** Weight will vary depending on options and/or country standards.

Features

Standard Features	Easily Configured To Meet Your Needs	Options & Accessories
-------------------	--------------------------------------	-----------------------

Measurements

- 11.94 m (39 ft 2 in) working height
- Up to 1,134 kg (2,500 lbs) lift capacity

Productivity

- Diamond plate deck
- Replaceable aluminum deck
- Folding guardrails
- Two self-closing full-height swing gates
- Proportional lift and drive
- Onboard diagnostic system
- Hydraulic oil cooler
- AC power to platform
- Positive traction control
- Four-wheel braking
- Tilt level sensor with audible alarm
- Descent alarm
- Dual Flashing LED beacons
- Horn
- Hour meter
- Telematics-Ready Connector

Power

- All engines are emissions compliant
- 12V DC auxiliary power
- Slide-out engine tray

Platform Options

- 3.98 x 1.83 m (13 ft 0.5 in x 6 ft) steel frame platform (standard)
- 1.52 m (5 ft) slide-out extension deck (standard)
- Dual slide-out platform extension deck package⁽¹⁾, 1.52 m (5 ft) front and 1.22 m (4 ft) rear (optional)
- 7.38 m (24 ft 2.5 in) super deck platform extension package^(1,2) (optional)

Outrigger Options

- Automatic levelling hydraulic outriggers⁽¹⁾
- No outriggers (standard)

Engine

- Deutz D2011L03i diesel 3 cylinder, 49hp(37kW) Stage IIIA
- Deutz TD2.2 L3 turbo diesel 3 cylinder, 49hp(37kW) Stage V

Drive

- 4 x 4

Axle

- Non oscillating

Tyre Options


- Foam-filled rough terrain (standard)
- Foam-filled, non-marking rough terrain

Productivity Options

- Air line to platform
- Power to platform: plug, socket, with optional Residual-current Circuit Breaker with Overcurrent protection
- Biodegradable hydraulic oil
- Track & Trace⁽³⁾ (GPS unit providing machine location & operating information)
- Motion alarm

Power Options

- Diesel catalytic scrubber muffler
- Low temperature cut-out module
- Engine heater
- 220V/50Hz or 110V/50Hz Generator for Big Deck Scissors

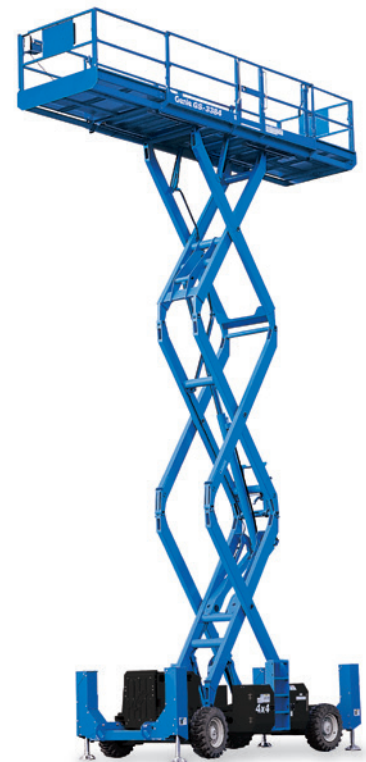

⁽¹⁾ Factory fit option only

⁽²⁾ Requires automatic levelling outriggers

⁽³⁾ Includes a first 2 years subscription

Europe, Middle East, Africa and Russia Region

United Kingdom and Europe, T: +44 800 988 3739 (toll free) or +31 165 519 349

Middle East, Southern Africa, Russia and Turkey, T: +971 4 399 0381

Visit www.genielift.com/en-gb/about-genie/locations to view our global locations list

Worldwide Manufacturing And Distribution

Australia · Brazil · Caribbean · Central America · China · France · Germany · Italy · Japan · Korea · Mexico · Russia · Southeast Asia · Spain · Sweden · United Arab Emirates · United Kingdom · United States

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2020 Terex Corporation.

